




CONNEX ELECTRIC MOTORS

CRSTF18-056-01-SL

Roll Steel * Single Phase * Farm Duty Motor

NEMA Design B * High Efficiency * High Starting Torque * Removable Feet

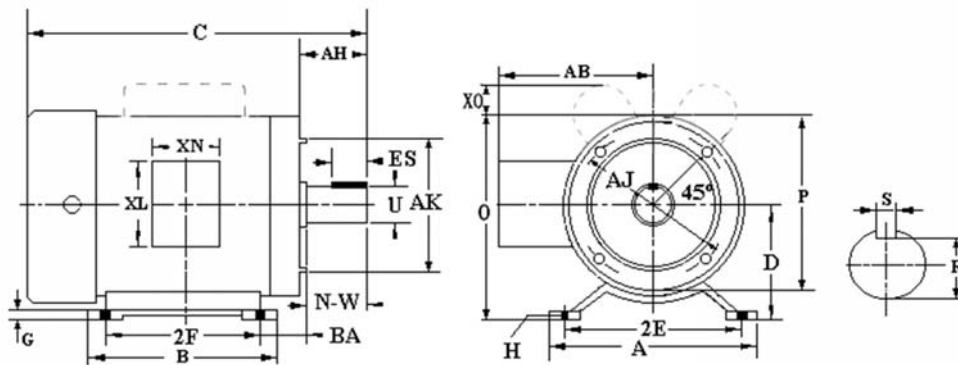

DIMENSIONAL DATA

| MOUNTING | | | | | | | CONDUIT BOX | | | BEARING | |
|------------------|-------|-----|------|-----|------|----------|-------------|-------|-------|---------|--------|
| D | E | 2F | A | B | BA | H | AB | XL | XN | DE | ODE |
| 3.5 | 2.44 | 3 | 6.5 | 6.5 | 2.75 | 1.22X.34 | 5.315 | 3.78 | 3.31 | 6203 | 6203 |
| MOTOR DIMENSIONS | | | | | | | KEYSEAT | | | | |
| AH | AJ | AK | P | O | OX | N-W | U | R | S | KEY | C DIM. |
| 1.88 | 5.875 | 4.5 | 7.44 | 6.5 | 7.5 | 1.88 | 0.625 | 0.516 | 0.188 | 1.42 | 13.1 |

PERFORMANCE DATA

50/60 Hz * Class F Insulation * 40°C Ambient * Continuous Duty * 1.15 Service Factor

| HP | FRAME | FULL LOAD RPM | EFF. | P. F | FULL LOAD AMPS | LOCKED ROTOR AMPS | VAC | LRT /TN | BRT /TN | TYPE | WGT |
|----|-------|---------------|------|------|----------------|-------------------|----------|---------|---------|------|-----|
| 1 | 56C | 1725 | 68 | 0.64 | 13.6/6.8 | 75.5/43.6 | 115/230V | 2.78 | 2.73 | CSIR | 42 |

CONNEX INDUSTRIAL CORP.

4975 AVALON RIDGE PKWY, SUITE 200, PEACHTREE CORNER, GA 30071

TOLL FREE: 1-877-884-2910 TEL: 770-248-9588 FAX: 770-248-9589

www.connex-electric.com