




# CONNEX ELECTRIC MOTORS

## CRSTF18-056-34-SL

### Roll Steel \* Single Phase \* Farm Duty Motor

NEMA Design B \* High Efficiency \* High Starting Torque \* Removable Feet

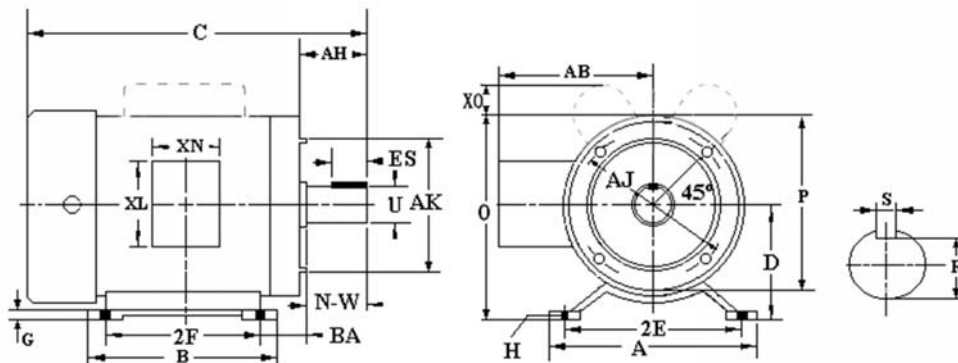

#### DIMENSIONAL DATA

MOUNTING							CONDUIT BOX			BEARING	
D	E	2F	A	B	BA	H	AB	XL	XN	DE	ODE
3.5	2.44	3	6.5	6.5	2.75	1.22X.34	5.315	3.78	3.31	6203	6203
MOTOR DIMENSIONS							KEYSEAT				
AH	AJ	AK	P	O	OX	N-W	U	R	S	KEY	C DIM.
1.88	5.875	4.5	7.44	6.5	7.5	1.88	0.625	0.516	0.188	1.42	12.3

#### PERFORMANCE DATA

50/60 Hz \* Class F Insulation \* 40°C Ambient \* Continuous Duty \* 1.15 Service Factor

HP	FRAME	FULL LOAD RPM	EFF.	P. F	FULL LOAD AMPS	LOCKED ROTOR AMPS	VAC	LRT /TN	BRT /TN	TYPE	WGT
3/4	56C	1725	66	0.64	11.0/5.5	51.8/29.6	115/230V	2.6	2.46	CSIR	35

#### CONNEX INDUSTRIAL CORP.

4975 AVALON RIDGE PKWY, SUITE 200, PEACHTREE CORNER, GA 30071

TOLL FREE: 1-877-884-2910 TEL: 770-248-9588 FAX: 770-248-9589

www.connex-electric.com