




# CONNEX ELECTRIC MOTORS

## CRSTF18-184-03-SL

### Roll Steel \* Single Phase \* Farm Duty Motor

NEMA Design B \* High Efficiency \* High Starting Torque \* Removable Feet

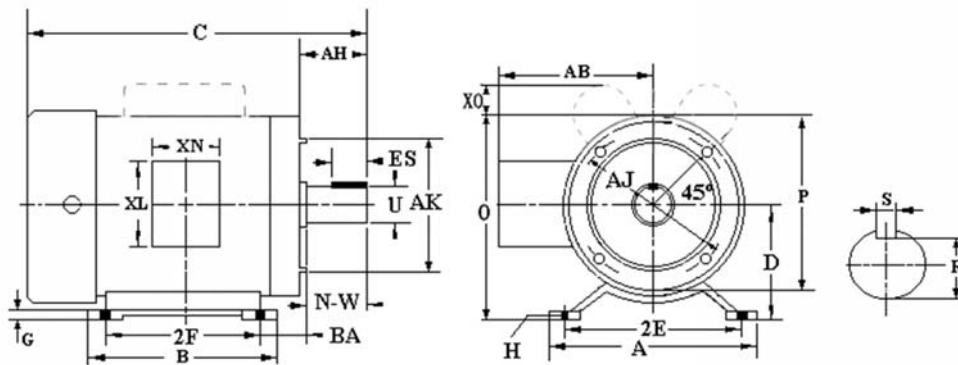

#### DIMENSIONAL DATA

MOUNTING							CONDUIT BOX			BEARING	
D	E	2F	A	B	BA	H	AB	XL	XN	DE	ODE
4.5	3.75	5.5	8.5	6.5	2.75	0.43	7.36	7.83	7.83	6206	6206
MOTOR DIMENSIONS							KEYSEAT				
AH	AJ	AK	P	O	OX	N-W	U	R	S	KEY	C DIM.
2.87	7.252	8.5	9.92	9.5	10.6	2.75	1.125	0.986	0.25	0.25	17.3

#### PERFORMANCE DATA

50/60 Hz \* Class F Insulation \* 40°C Ambient \* Continuous Duty \* 1.15 Service Factor

HP	FRAME	FULL LOAD RPM	EFF.	P. F	FULL LOAD AMPS	LOCKED ROTOR AMPS	VAC	LRT /TN	BRT /TN	TYPE	WGT
3	184T	1725	81.3	0.92	25.8/12.9	167/96	115/230V	3.58	2.58	CSCR	86

#### CONNEX INDUSTRIAL CORP.

4975 AVALON RIDGE PKWY, SUITE 200, PEACHTREE CORNER, GA 30071

TOLL FREE: 1-877-884-2910 TEL: 770-248-9588 FAX: 770-248-9589

www.connex-electric.com