




CONNEX ELECTRIC MOTORS

CRSTF18-184-05-SL

Roll Steel * Single Phase * Farm Duty Motor

NEMA Design B * High Efficiency * High Starting Torque * Removable Feet

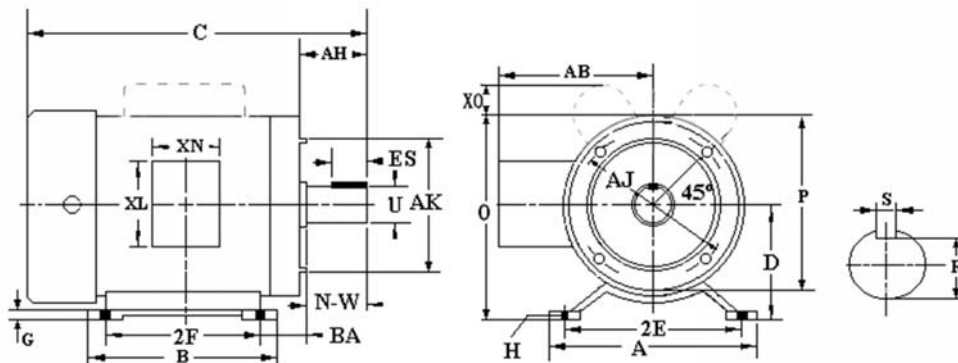

DIMENSIONAL DATA

MOUNTING							CONDUIT BOX			BEARING	
D	E	2F	A	B	BA	H	AB	XL	XN	DE	ODE
4.5	3.75	5.5	8.5	6.5	2.75	0.43	7.36	7.83	7.83	6206	6206
MOTOR DIMENSIONS							KEYSEAT				
AH	AJ	AK	P	O	OX	N-W	U	R	S	KEY	C DIM.
2.87	7.252	8.5	9.92	9.5	10.6	2.75	1.125	0.986	0.25	0.25	18.8

PERFORMANCE DATA

50/60 Hz * Class F Insulation * 40°C Ambient * Continuous Duty * 1.15 Service Factor

HP	FRAME	FULL LOAD RPM	EFF.	P. F	FULL LOAD AMPS	LOCKED ROTOR AMPS	VAC	LRT /TN	BRT /TN	TYPE	WGT
5	184T	1725	81	0.9	42.4/21.2	277/159	115/230V	3.79	2.39	CSCR	106

CONNEX INDUSTRIAL CORP.

4975 AVALON RIDGE PKWY, SUITE 200, PEACHTREE CORNER, GA 30071

TOLL FREE: 1-877-884-2910 TEL: 770-248-9588 FAX: 770-248-9589

www.connex-electric.com