




CONNEX ELECTRIC MOTORS

CRSTF18-213-72-SL

Roll Steel * Single Phase * Farm Duty Motor

NEMA Design B * High Efficiency * High Starting Torque * Removable Feet

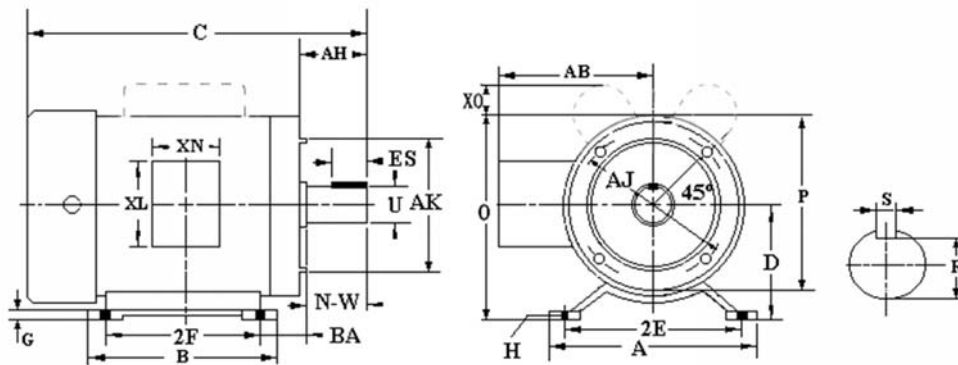

DIMENSIONAL DATA

MOUNTING							CONDUIT BOX			BEARING	
D	E	2F	A	B	BA	H	AB	XL	XN	DE	ODE
5.25	4.25	7	9.4	8	3.5	0.43	7.95	7.83	7.83	6307	6306
MOTOR DIMENSIONS							KEYSEAT				
AH	AJ	AK	P	O	OX	N-W	U	R	S	KEY	C DIM.
3.63	7.252	8.5	11.1	10.8	11.9	3.38	1.375	1.201	0.312	0.312	21.2

PERFORMANCE DATA

50/60 Hz * Class F Insulation * 40°C Ambient * Continuous Duty * 1.15 Service Factor

HP	FRAME	FULL LOAD RPM	EFF.	P. F	FULL LOAD AMPS	LOCKED ROTOR AMPS	VAC	LRT /TN	BRT /TN	TYPE	WGT
7.5	213T	1725	85.5	0.93	62.4/31.2	423/243	115/230V	3.35	2.26	CSCR	178

CONNEX INDUSTRIAL CORP.

4975 AVALON RIDGE PKWY, SUITE 200, PEACHTREE CORNER, GA 30071

TOLL FREE: 1-877-884-2910 TEL: 770-248-9588 FAX: 770-248-9589

www.connex-electric.com