




CONNEX

ELECTRIC MOTOR

CSSTF18-145-15JM

Stainless Steel - TEFC Three Phase Motor

NEMA Design B - High Efficiency - Inverter Duty - Squirrel Cage AC Motor

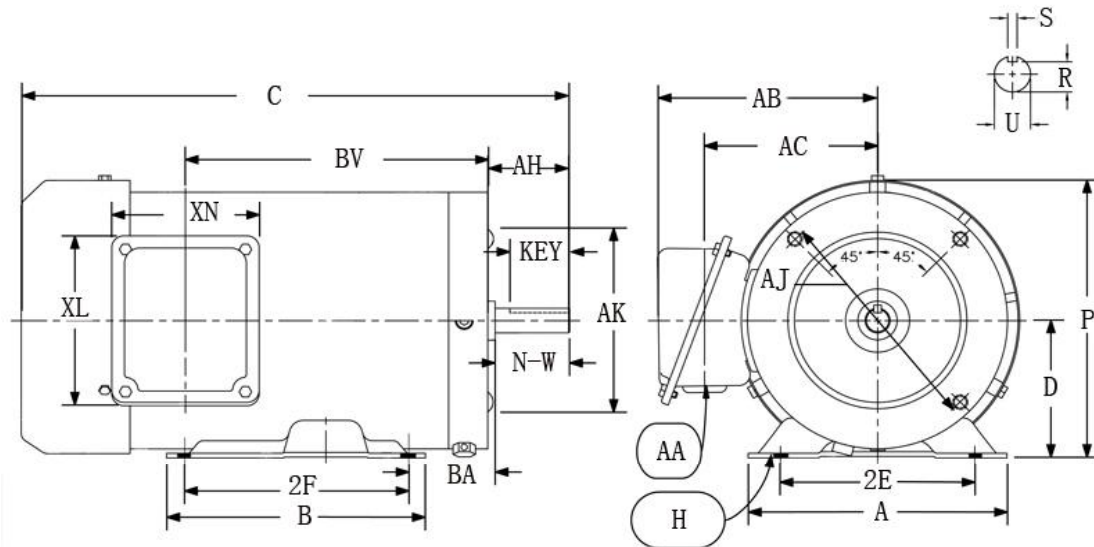

DIMENSIONAL DATA

Mounting							Conduit Box						
D	E	2F	A	B	BA	H	AB	AC	XL	XN	AA		
3.5	2.75	4	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.8	0.86		
Motor dimensions						Keyseat			Bearings		Enclos.	F/R	
C	AH	AJ	AK	P	N-W	U	R	KEY	ODE	DE			
15.84	4.28	5.875	4.50	6.50	4.25	0.875	0.517	1.65	6205Z	6205Z	TEFC	FOOT	

PERFORMANCE DATA

Three Phase - 50/60 Hz - Class F Insulation - 40°C Ambient - Continuous Duty - 1.15 Service Factor

HP	Frame	Full Load RPM	Efficiency%			Power Factor		Amps@460v		Full Load Torque (lb-ft)	Locked Rotor Torque (%FLT)	Pull Out Torque (%FLT)	Approx Weight (lbs)
			100% F.L.	75% F.L.	50% F.L.	100% F.L.	75% F.L.	Full Load	Locked Rotor				
1 1/2	145TC	1740	84.0%	83%	79%	0.83	0.76	2.0	13.6	4.4	233%	298%	42