




**CONNEX**

**ELECTRIC MOTOR**

## CSSTF18-182-03JM

### Stainless Steel - TEFC Three Phase Motor

NEMA Design B - High Efficiency - Inverter Duty - Squirrel Cage AC Motor

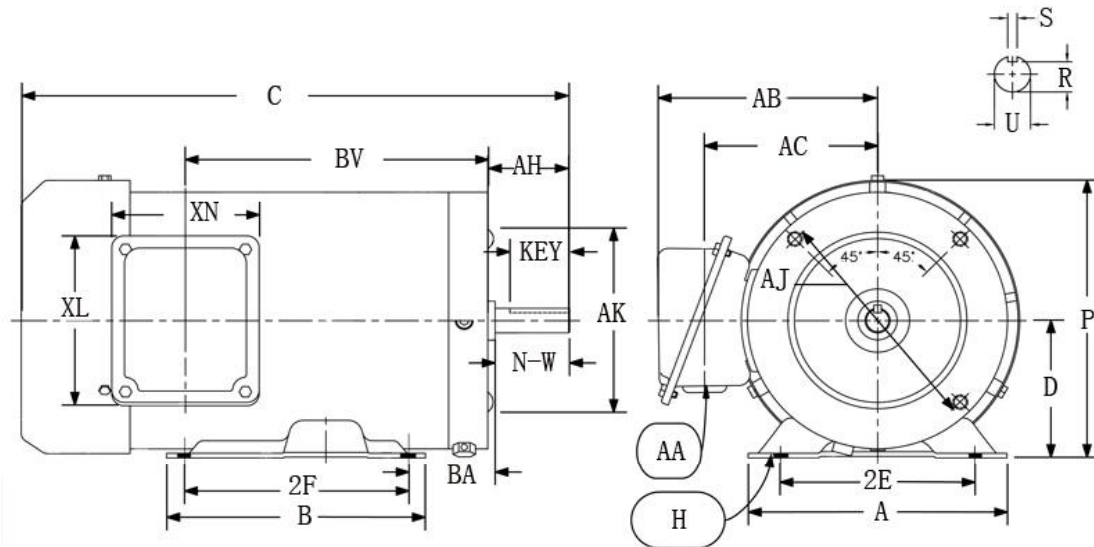

### DIMENSIONAL DATA

Mounting							Conduit Box						
D	E	2F	A	B	BA	H	AB	AC	XL	XN	AA		
4.5	3.75	4.5	8.8	6.5	3.5	.71*.47	7	5.3	4.45	4.05	0.94		
Motor dimensions						Keyseat			Bearings		Enclos.	F/R	
C	AH	AJ	AK	P	N-W	U	R	KEY	ODE	DE			
18.06	4.22	5.875	4.5	8.9	4.25	0.875	0.771	1.65	6307Z	6308Z	TEFC	FOOT	

### PERFORMANCE DATA

Three Phase - 50/60 Hz - Class F Insulation - 40°C Ambient - Continuous Duty - 1.15 Service Factor

HP	Frame	Full Load RPM	Efficiency%			Power Factor		Amps@460v		Full Load Torque (lb-ft)	Locked Rotor Torque (%FLT)	Pull Out Torque (%FLT)	Approx Weight (lbs)
			100% F.L.	75% F.L.	50% F.L.	100% F.L.	75% F.L.	Full Load	Locked Rotor				
3	182TC	1765	87.5%	87%	85%	0.81	0.79	4.0	29.0	8.8	225%	324%	81