


- ★ Washdown Duty Applications
- ★ Mill and Chemical Duty
- ★ Corrosion Resistant
- ★ Drill & Tapped Drains
- ★ Etched Nameplated on Body
- ★ NEMA MG1 Part 31
- ★ CSA Certified
- ★ Food Processing
- ★ Pharmaceutical
- ★ UL Recognized
- ★ Foot Mount & Round Body
- ★ Double Lip contact Seals
- ★ Premium Efficiency
- ★ High Efficiency

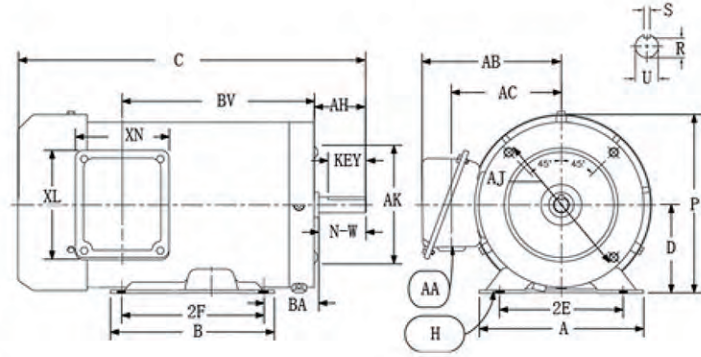

Frame	Mounting							Conduit Box					Motor Dimensions						Keyseat			Bearings		Enclos.
	D	E	2F	A	B	BA	H	AB	AC	XL	XN	AA	C	AH	AJ	AK	P	N-W	U	R	KEY	ODE	DE	
56C	3.5	2.44	3.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	11.59	2.06	5.875	4.5	6.5	1.88	0.625	0.517	1.41	6205Z	6205Z	TEFC
143TC	3.5	2.75	4.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	12.63	2.12	5.875	4.5	6.5	2.25	0.875	0.517	1.41	6205Z	6205Z	TEFC
143JM	3.5	2.75	4.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	15.84	4.22	5.875	4.5	6.5	4.25	0.875	0.771	1.65	6205Z	6205Z	TEFC
145TC	3.5	2.75	4.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	13.68	2.12	5.875	4.5	6.5	2.25	0.875	0.771	1.41	6205Z	6205Z	TEFC
145JM	3.5	2.75	4.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	15.84	4.28	5.875	4.5	6.5	4.25	0.875	0.771	1.65	6205Z	6205Z	TEFC
182TC	4.5	3.75	4.5	8.8	6.5	3.50	.71*.47	7.00	5.30	4.45	4.05	0.94	16.40	2.62	7.250	8.5	8.9	2.75	1.125	0.986	1.78	6306Z	6308Z	TEFC
182JM	4.5	3.75	4.5	8.8	6.5	3.50	.71*.47	7.00	5.30	4.45	4.05	0.94	18.06	4.22	5.875	4.5	8.9	4.25	0.875	0.771	1.65	6307Z	6308Z	TEFC
184TC	4.5	3.75	4.5	8.8	6.5	3.50	.71*.47	7.00	5.30	4.45	4.05	0.94	16.40	2.62	7.250	8.5	8.9	2.75	1.125	0.986	1.78	6306Z	6308Z	TEFC
184JM	4.5	3.75	4.5	8.8	6.5	3.50	.71*.47	7.00	5.30	4.45	4.05	0.94	18.06	4.28	5.875	4.5	8.9	4.25	0.875	0.771	1.65	6307Z	6307Z	TEFC
213TC	5.25	4.25	5.5	10	8.5	4.25	.71*.47	7.60	6.20	4.45	4.05	0.94	21.50	3.12	7.250	8.5	10	3.38	1.375	1.201	2.41	6208zz	6308zz	TEFC
213JM	5.25	4.25	5.5	10	8.5	4.25	.71*.47	7.60	6.20	4.45	4.05	0.94	23.46	4.22	7.250	8.5	10	4.25	0.875	0.771	1.65	6308zz	6308zz	TEFC
215TC	5.25	4.25	7.0	10	8.5	4.25	.71*.47	7.60	6.20	4.45	4.05	0.94	22.30	3.12	7.250	8.5	10	3.38	1.375	1.201	2.41	6208zz	6308zz	TEFC
215JM	5.25	4.25	7.0	10	8.5	4.25	.71*.47	7.60	6.20	4.45	4.05	0.94	23.46	4.28	7.250	8.5	10	4.25	0.875	0.771	1.65	6308zz	6308zz	TEFC

56C	3.5	2.44	3.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	9.80	2.06	5.875	4.5	6.5	1.88	0.625	0.517	1.41	6205Z	6205Z	TENV
143TC	3.5	2.44	3.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	10.78	2.12	5.875	4.5	6.5	2.25	0.875	0.517	1.41	6205Z	6205Z	TENV

PICKER DUTY MOTOR

** F. O. Conduit Location

145T	3.5	2.75	4.0	6.5	6.5	2.25	.71*.47	5.35	4.21	4.45	4.05	0.94	15.04	2.12	5.875	4.5	6.5	2.25	0.875	0.771	1.41	6205Z	6205Z	TEFC
------	-----	------	-----	-----	-----	------	---------	------	------	------	------	------	-------	------	-------	-----	-----	------	-------	-------	------	-------	-------	------

ADDITIONAL RATING

56HCZ	3.5	2.44	3.0	6.5	6.5	2.75	1.22X.34	5.75	4.25	4.72	3.80	0.86	13.62	2.06	5.875	4.5	6.5	1.88	0.625	0.517	1.41	6205Z	6205Z	TEFC
-------	-----	------	-----	-----	-----	------	----------	------	------	------	------	------	-------	------	-------	-----	-----	------	-------	-------	------	-------	-------	------